

09-07-00

A

FISH & RICHARDSON P.C.

4350 La Jolla Village Drive
Suite 500
San Diego, California
92122

Telephone
858 678-5070

Facsimile
858 678-5099

Web Site
www.fr.com

September 5, 2000

Attorney Docket No.: 06816/021002/CIT2386

Box Patent Application
Commissioner for Patents
Washington, DC 20231

Presented for filing is a new continuation patent application of:

Applicant: ORLY YADID-PECHT AND ERIC R. FOSSUM

Title: AN IMAGE SENSOR WITH HIGH DYNAMIC RANGE LINEAR
OUTPUT

Enclosed are the following papers, including those required to receive a filing date
under 37 CFR 1.53(b):

	Pages
Specification	24
Claims	1
Abstract	1
Declaration	2 (copy from parent)
Drawing(s)	5

Enclosures:

- Rule 63 declaration, copy from a previous application under rule 63(d)
for continuation or divisional only.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL584936636US

I hereby certify under 37 CFR §1.10 that this correspondence is being
deposited with the United States Postal Service as Express Mail Post
Office to Addressee with sufficient postage on the date indicated below
and is addressed to the Commissioner for Patents, Washington,
D.C. 20231.

Date of Deposit September 5, 2000

Signature *Derek Norwood*

Derek Norwood
Typed or Printed Name of Person Signing Certificate

09/05/00
JC922 U.S. PTO

Frederick P. Fish
1855-1930

W.K. Richardson
1859-1951

FR

BOSTON

DALLAS

DELAWARE

NEW YORK

SAN DIEGO

SILICON VALLEY

TWIN CITIES

WASHINGTON, DC

09/05/00
JC511 U.S. PTO
09/654922

Commissioner for Patents

September 5, 2000

Page 2

- Information Disclosure Statement: Applicant calls attention to documents listed on attached form(s) PTO-892 and PTO-1449 from parent case(s). Per Rule 97(d) copies of those documents are not provided.
- Small Entity Statement from parent application. This application is entitled to small entity status.
- Postcard.

This application is a continuation (and claims the benefit of priority under 35 USC 120) of U.S. application serial no. 08/744,494, filed November 7, 1996. The disclosure of the prior application is considered part of (and is incorporated by reference in) the disclosure of this application.

Preliminary Amendment:

Page 1 of the specification, before line 1, insert --This is a continuation of U.S. application serial no.08/744,494, filed November 7, 1996 (pending).—

The prior application is assigned of record to California Institute of Technology, a California corporation, by virtue of an assignment recorded in the Patent and Trademark Office on March 31, 1997 at Reel/Frame 8426/0704.

Basic filing fee	\$345
Total claims in excess of 20 times \$9	\$0
Independent claims in excess of 3 times \$39	\$0
Fee for multiple dependent claims	\$0
Total filing fee:	\$345

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.

If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (858) 678-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

[illegible]

Commissioner for Patents
September 5, 2000
Page 3

Please send all correspondence to:

SCOTT C. HARRIS
Fish & Richardson P.C.
PTO Customer No. 20985
4350 La Jolla Village Drive, Suite 500
San Diego, CA 92122

Respectfully submitted,

Scott C. Harris
Reg. No. 32,030
Enclosures
SCH/nsg
10052020.doc

CIT 2586

ATTORNEY DOCKET NO. 06816/021001

Applicant or Patentee: Eric Fossum et al.

Serial or Patent No.:

Filed or Issued: November 7, 1986

For: METHOD OF OPERATING AN IMAGE SENSOR WITH ULTRA HIGH DYNAMIC RANGE LINEAR OUTPUT

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(d)) - NONPROFIT ORGANIZATION

I hereby declare that I am an official empowered to act on behalf of the nonprofit organization identified below:

Name of Organization: California Institute of Technology
Address of Organization: 1201 East California Boulevard, Pasadena, CA 91125
Type of Organization:

- ☐ UNIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION
☒ TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC 501(c) and 501(c)(3))
☒ NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA
 (NAME OF STATE: California)
 (CITATION OF STATUTE:)
☒ WOULD QUALIFY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC 501(c) and 501(c)(3)) IF LOCATED IN THE UNITED STATES OF AMERICA
☐ WOULD QUALIFY AS NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA IF LOCATED IN THE UNITED STATES OF AMERICA
 (NAME OF STATE:)
 (CITATION OF STATUTE:)

I hereby declare that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code with regard to the invention entitled METHOD OF OPERATING AN IMAGE SENSOR WITH ULTRA HIGH DYNAMIC RANGE LINEAR OUTPUT inventors ERIC FOSSUM AND OKLY YABID-PECIT described in

- ☒ the specification filed herewith.
☐ application serial no. filed
☐ patent no. , issued .

I hereby declare that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights to the invention is listed below and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Full Name: _____

Address: _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☒ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name: Michael L. KellerTitle: Chief Patent CounselAddress: 1201 East California Boulevard, Pasadena, CA 91125Signature: *Michael L. Keller*Date: 11/17/86

005060 22845960

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: AN IMAGE SENSOR WITH HIGH DYNAMIC RANGE
LINEAR OUTPUT

APPLICANT: ORLY YADID-PECHT AND ERIC R. FOSSUM

CERTIFICATE OF MAILING BY EXPRESS MAIL


Express Mail Label No. EL584936636US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

September 5, 2000

Date of Deposit

Signature

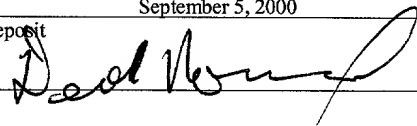

Derek Norwood

Typed or Printed Name of Person Signing Certificate

005060 22645960

AN IMAGE SENSOR WITH HIGH DYNAMIC RANGE LINEAR OUTPUT

This application claims the benefits of the U.S. Provisional Application No. 60/006,260, filed on November 7, 1995.

Origin of the Invention

The invention described herein was made in the performance of work under a NASA contract and is subject to the provisions of Public Law 96-517 (35 USC 202) in which the Contractor has elected to retain title.

Field of the Invention

The present invention relates to semiconductor image sensor, and more specifically, to a system and method of extending dynamic range in CMOS active pixel sensor circuits.

Background and Summary of the Invention

An active pixel sensor ("APS") is a special kind of light sensing device. Each active pixel includes a light sensing element and one or more active transistors within the pixel itself. The active transistors amplify and buffer the signals generated by the light sensing elements in the pixels. One type of such APS devices is disclosed in U.S.

Patent No. 5,471,515 by Fossum et al., the disclosure of which is incorporated herein by reference.

5 APS devices represent an emerging technology in a wide range of imaging applications. APS has a number of significant advantages in comparison with the well-developed and widely used charge coupled devices (CCDs). Because of the number of stages in a CCD, a nearly perfect charge transfer efficiency must be maintained in a CCD in order to maintain good signal fidelity. This usually makes CCDs susceptible to damage from both ionizing and displacement damage. In particular, the displacement damage caused by high-energy particles and photons may prove to be deadly to CCDs.

15 Large CCD arrays present engineering difficulties in manufacturing. Device miniaturization is difficult with CCD devices since the extreme requirements of CCDs necessitate a special formation process. This formation process prevents CCDs from being easily integrated with on-chip integrated circuits such as complementary-metal-oxide-semiconductor (CMOS) integrated circuits. CCDs also suffers limited spectral responsivity range and readout rates. Furthermore, the readout of CCDs is destructive, i.e., their stored value is destroyed upon reading out. Implementation of the nondestructive readout in a CCD device is difficult.

25 In contrast, an APS device receives and processes input

5 signals with the active pixel itself, thus eliminating the charge transfer over distances that are inherent in CCDs. Consequently, many drawbacks associated with CCDs are avoided in APS devices. For example, the performance of APS devices can be maintained as the array size increases. The APS readout rate is usually higher than that of CCDs. Since CMOS circuitry is often associated with the image sensor, the power consumption can be significantly reduced. APS devices are inherently compatible with CMOS processes, allowing reduced cost of manufacturing. Many on-chip operations and controls can be relatively easily implemented including timing and analog-to-digital conversion. APS devices are also less vulnerable to radiation damage and can be designed for non-destructive readout. Moreover, the active pixels of APS devices allow random access and on-chip signal processing.

10
15
20 One important benchmark in performance of imaging devices is the ratio of the saturation level of the detectors and the noise level thereof or the signal-to-noise ratio (SNR). This can be expressed in terms of dynamic range of the device. The dynamic range is usually expressed in dB by $20\log(\text{SNR})$ or in binary (bits) by $\log_2(\text{SNR})$. The larger the dynamic range, the better an imaging devices.

25 In particular, a large dynamic range is desirable in applications for sensing low light signals and capturing

images with large variations in brightness.

5 The dynamic range of previously-reported CMOS-based APS circuits has been limited by both the saturation level of the signal chain circuit, which is typically about 1.2 volts for a 5-volt power supply, and the noise floor of the sensor, which is typically about 150 μ V. This results in a dynamic range of approximately 78dB (13 bits), which is comparable to the dynamic range of the state-of-art CCD devices.

The output voltage signal of an imaging device is dependent on the input light level, the efficiency of the optical coupling device and the detector characteristics including the quantum efficiency, the effective active sensing area, the integration time, and the electrical conversion gain of volts/electron. The output signal can be approximately expressed as the following:

$$V_{out} \approx \frac{\Phi}{4f^2} \tau_{optics} A_{det} T_{int} \eta G, \quad (1)$$

20 where Φ is the incident photon flux, f is the f-stop of the coupling optical system, τ_{optics} is the transmission of the optical system, A_{det} is the pixel size, T_{int} is the integration time, η is the pixel quantum efficiency, and G is the conversion gain in volts/electron. The typical values for a

APS device are $f/8$, 80% for τ_{optics} , $20\mu\text{m}$ for A_{det} , 33ms for T_{int} , 25% in η , and $G \approx 10\mu\text{V}/e^-$, respectively.

5 The exposure of an imaging device for a given hardware configuration is usually controlled by changing either the aperture (i.e., f-stop) or the integration time. If the input light level is low, the integration time is increased to improve the signal-to-noise ratio. If the input light is bright, the integration time is reduced to avoid saturation of the detector while maintaining a high SNR. The lower limit of the integration time is set by the readout time.

15 A number of prior-art techniques exist for controlling the integration time. For example, the integration time of a CMOS APS device with N rows of pixels can be controlled by resetting a row of pixels in advance of readout. If the readout time for one row of pixels is T_{row} , the total frame readout time is NT_{row} . Since the pixels of a row are reset for a new integration upon readout, the integration time is simply the frame time NT_{row} .

20 FIG. 1 illustrates an exemplary APS. A pixel array 102 has N rows of pixels with each row having M columns. A column-parallel signal chain 194 such as a sampling capacitor bank with M storage cells is used for readout.

25 In a specific operation of readout, a particular row is selected for readout at one time. The sensor data from the M pixels in the selected row is copied onto the capacitor

bank 104. The copy process also resets the pixels in the selected row and begins a new integration. The M storage cells in the capacitor bank 104 is then scanned sequentially for readout. The above readout process is then repeated for the next row. Therefore, the integration time for each pixel is identical and is equal to the readout time of a frame, i.e., NT_{row} .

Another prior-art approach uses an electronic switching mechanism built in the pixel design of a CMOS APS device, allowing electronic shuttering and simultaneous integration. This was disclosed in U. S. Provisional Application No. 60/010,305 filed on January 22, 1996 by Fossum et al.

The inventors of the present invention recognized a limitation of the above two methods in that the exposure remains the same for the entire image. This can result in distortion of the detected images in some circumstances. For example, an outdoor scene might be optimally exposed for the sunlit areas but overexposed in the shadowed areas. This can result in loss of detail in shadowed areas.

One solution to the above problem is to use a nonlinear output sensor. Such a sensor is designed to have a high differential gain for light levels, and low differential gain for high light levels. It is desirable that the nonlinear gain be achieved within each pixel. As a result, pixel to pixel variations in the transfer function can lead

to unacceptable values of fixed pattern noise.

Another approach is to implement multiple storage sites in each pixel in CCD devices to record different integration signals from the same pixel. In case of two storage sites in each pixel, one storage site corresponds to a short integration period and the second to a long integration period, thus increasing the dynamic range. The readout data can be transformed to a lower bit count encoding using nonlinear techniques for display, storage, and transmission. One limitation of this technique is a decreased readout rate since the readout time may be doubled since twice as much of the amount of data may need to be read. Another limitation is the reduced fill factor since two storage sites occupy considerable pixel area.

In view of the above limitations, the present invention describes a new technique in APS sensors and operation methods thereof to increase their dynamic ranges. According to the preferred embodiments of the present invention, at least two different integration times are obtained for each active pixel. One or more column-parallel signal chains are used to implement the multiple integration times for each active pixel. For an APS device with only one column-parallel signal chain for readout, each pixel is sampled multiple times during a single frame readout, thus resulting in multiple integration times.

Another aspect of the present invention increases the frame rate by using more than one column-parallel signal chain to achieve multiple data points of different integration times for each pixel. A maximal frame rate is achieved for a given APS device by having the number of column-parallel signal chains match the number of different integration times. A preferred operation mode of such system in accordance with the present invention includes simultaneously copying multiple columns into the column-parallel signal chains and subsequently reading out all the column-parallel signal chains simultaneously with each being scanned in a sequential manner. The frame rate is increased by a factor equal to the number of the column-parallel signal chains as compared with achieving the same number of integration times with a single column-parallel signal chain for readout. The dynamic range of the APS device is thus extended by a factor given by the ratio of the longest integration time versus the shortest integration time.

A new readout method is also described. This method can be used to improve the dynamic range of a conventional APS device having a single column-parallel signal chain by achieving multiple integration times for each active pixel. Special advantages are obtained when used with non-destructive readout of an APS device in achieving multiple integration times of each pixel.

Another aspect incorporates digital processors including analog-to-digital converters in the column-parallel signal chains.

On-chip buffer memory units and/or multiple source followers may be used for each pixel to further enhance the flexibility and performance of the systems in accordance with the present invention.

Brief Description of the Drawing

These and other advantages of the present invention will become more apparent in the light of the following detailed description of preferred embodiments thereof, as illustrated in the accompanying drawings, in which:

FIG. 1 illustrates an active pixel sensor with a single column-parallel signal chain to produce the same integration time for every pixel.

FIG. 2 shows an active pixel sensor with two column-parallel signal chains for readout in accordance with a preferred embodiment of the present invention.

FIG. 3 shows one example of an active pixel structure and a cell for the column-parallel signal chain disclosed by the U.S. Patent No. 5,471,515.

FIG. 4 shows a readout method for achieving multiple integration times using an active pixel sensor with a single column-parallel signal chain.

FIG. 5 shows another floor plan for positioning the two column-parallel signal chains relative to the active pixel array.

Description of the Preferred Embodiments

5 The description of the preferred embodiments will use CMOS APS devices as an example for implementation. However, it should be understood that the method and design can also be implemented in other active pixel sensors, and may be usable in other image acquiring systems.

Design Architectures and Operation Modes

15 20 FIG. 2 illustrates the first preferred embodiment 200 of the present invention. An active pixel array 202 has N rows and M columns, hence with a total of $N \times M$ pixels. Each pixel comprises a light sensing element and one or more active transistors. The active transistors amplify and buffer the signals generated by the light sensing element in the pixel. Each active pixel has one output source follower that is connected to the corresponding column bus. There are two column-parallel signal chains for readout. Each of the signal chains, 204 and 206, has M storage cells for temporarily storing the electrical signals from the pixels being read. The column-parallel signal chains 204 and 206 can be implemented with capacitor banks for analog

processing and analog-to-digital converters (ADCs) for digital processing or any other device that is capable of storing image information.

5 The device 200 also includes an control circuit (not shown) having row and column decoders for addressing the proper row/column of pixels, clock generator circuits for synchronization, and readout circuits. The control circuit is operable to control the readout of the pixels and the operation of the column-parallel signal chain(s) in a desired sequence with desired integration time(s).

10 An example of such active pixel and the storage cell in a column-parallel signal chain is shown in FIG. 3. This is disclosed in the incorporated reference U.S. Patent Application No. 5,471,151 which describes an active pixel array with a single column-parallel signal chain for readout. FIG. 3 shows the active pixel 302 including a photogate 310, a DC biased transfer gate 311, an output floating diffusion 314, a reset transistor 315, a drain diffusion 316, a gate source follower 317, and a row selection transistor 318. The circuit 304 represents a storage cell shared by a column of active pixels. The storage cell 304 includes a load transistor 320, a first output circuit 321 for buffering and exporting the reset level, and a second output circuit 322 for buffering and exporting the signal level. In the architecture shown in

15
20
25

FIG. 2, each active pixel of a column is connected to two such storage cells substantially similar to 304. It should be understood that other design of the active pixel and column storage cell can also be used in accordance with the present invention.

In operation, a row of pixels in the active pixel array 202, e.g., the row n 210, is first selected for readout. The signals representing the M pixels of the row n 210 are copied simultaneously to the corresponding M storage cells in the first column-parallel signal chain 204. The time duration of the copying process is T_{copy} , typically about 1-10 μ s for an APS device. The copying process also resets the pixels in the row n 210 and a new integration in the row n 210 is started. Secondly, the signals of M pixels in another row 220 that is shifted by Δ rows relative to row 210, i.e., the row (n- Δ), are simultaneously copied to the corresponding M storage cells in the second column-parallel signal chain 206 during time T_{copy} and the pixels in the row (n- Δ) 220 is subsequently reset for another integration.

The M storage cells in each of the first column-parallel signal chain 204 and the second column-parallel signal chain 206 are simultaneously and respectively scanned for readout. The M storage cells in each column-parallel signal chain is sequentially scanned and the signals therein are read out.

This completes the readout of the row n 210 and row (n- Δ)

220. The time for scanning and reading one pixel is T_{scan} , which is typically between 100ns-10 μ s. Then, the next two rows are selected for readout in the same fashion. Therefore, a single row readout process reads two separated rows of pixels.

The above readout process repeats until every row in the active pixel array 202 are read to complete a frame. This results in two sets of data from every active pixel in the array 202, one from the first column-parallel signal chain 204 and another one from the second column-parallel signal chain 206, respectively. The two sets of data have different integration times and the two data points for the same pixel are read out at different times by a time lag of the time for a row readout process multiplied by Δ .

The time for a row readout is

$$T_{row} = 2T_{copy} + MT_{scan} \quad (2)$$

comparing to $(T_{copy} + MT_{scan})$ in a row readout in the prior-art system as in FIG. 1. The total readout time for a frame is given by:

$$T_{frame} = NT_{row} \quad (3)$$

In the prior-art system of FIG. 1, the integration time for each pixel is the same and is the readout time for a frame. However, the two sets of readout from the two column-parallel signal chains 204 and 206 in the system of FIG. 2 have different integration times. The integration time for the signals copied into the first column-parallel signal chain 204 is given by:

$$T_{1int} = (N - \Delta) T_{row} \quad (4)$$

and the integration time for the signals copied to the second column-parallel signal chain 206 is given by

$$T_{2int} = \Delta T_{row} \quad (5)$$

As a result, the dynamic range D_2 of the active pixel sensor 200 is improved over the dynamic range D_1 of the system 100 by a factor of T_{1int}/T_{2int} :

$$D_2 (dB) = \log \left(\frac{T_{1int}}{T_{2int}} \right) + D_1 (dB) ; \quad (6)$$

$$D_2(bits) = \log_2 \left(\frac{T_{1int}}{T_{2int}} \right) + D_1(bits). \quad (7)$$

For example, when $N=512$ and $\Delta=2$, then a 13-bit dynamic range is thus extended by 8 bits to 21 bits, or from 78dB to 126dB.

The detected image is reconstructed by reading out the bright portions of the image with the data of short integration time T_{2int} from the second column-parallel signal chain 206. Conversely, darker portions of the image are read out using the data of long integration time T_{1int} from the first column-parallel signal chain 204. Therefore, portions of a scene which appear saturated by the long integration time T_{1int} can be managed by using the short integration time T_{2int} .

The second embodiment of the present invention uses the readout technique for the system 200 of FIG. 2 in the system 100 of FIG. 1 to extend the dynamic range. The readout sequence is illustrated in FIG. 4. The row n of pixels 110 in the active pixel array 102 is first selected for readout. The signals in the M pixels of the row n 110 are then copied simultaneously to the corresponding M storage cells in the column-parallel signal chain 104. The copying process also

5 resets the pixels in the row n 110 and begins a new integration in the row n 110. Subsequently, the M storage cells of the column-parallel signal chain 104 is sequentially scanned and the signals therein are read out. Next, the signals of M pixels of another row(n-Δ) 402 are simultaneously copied to the corresponding M storage cells in the column-parallel signal chain 104. The row 402 is displaced from the row 110 by Δ number of rows. The pixels in the row (n-Δ) 402 are subsequently reset for another integration. Subsequently, the M storage cells of the column-parallel signal chain 104 is again sequentially scanned and the signals therein are read out. This completes one row readout process which takes a total time of $(2T_{copy} + 2MT_{scan}) = 2T_{row}$.

10 The above process then repeats for row (n+1) and row (n-Δ+1), etc. until all N rows of active pixels in the array 102 are processed. The total frame readout time is $N(2T_{copy} + 2MT_{scan}) = 2NT_{row}$, which is twice as long as the frame time in the prior-art readout shown in FIG. 1. However, two sets of data are obtained using the readout of FIG. 4, one set having a first integration time, $T_{1int} = (N-Δ)2T_{row}$ and another set having a second integration time, $T_{1int} = Δ2T_{row}$. Two data points of different integration times from the same pixel are read out at two different times. The time lag

between reading out the two data points is

$$\Delta(2T_{copy} + 2MT_{scan}) = 2\Delta T_{row}.$$

The increase in the dynamic range is essentially the same as in the first embodiment using a sensor design 200 of two column-parallel signal chains although the integration times are different. The second embodiment has an additional advantage of being compatible with previously-fabricated CMOS APS sensors with single column-parallel signal chain but has a reduced frame rate for readout due to the increased readout time per frame.

A third embodiment implements more than two integration times in an active pixel array. For a number of k integration times ($k > 1$) for each active pixel, the respective integration times are $T_{1int} = k \Delta_1 T_{row}$, $T_{2int} = k \Delta_2 T_{row}$, ..., and $T_{kint} = k(N - \Delta_1 - \Delta_2 \dots - \Delta_{k-1}) T_{row}$, if the architecture 100 of FIG. 1 is used in which there is only one column-parallel signal chain for readout. The respective readout time for a frame is $T_{frame} = NkT_{row}$. For example, $N=585$ and $k=4$, Δ_1 may be chosen to be 1, $\Delta_2=8$, $\Delta_3=64$ so that $T_{1int} = 1 \times 4T_{row}$, $T_{2int} = 8 \times 4T_{row}$, $T_{3int} = 64 \times 4T_{row}$, and $T_{4int} = 512 \times 4T_{row}$.

In addition, k column-parallel signal chains can be implemented and used in a similar way as in the first embodiment 200. k rows of pixels are read out simultaneously and stored in the k column-parallel signal

chains, respectively. The k column-parallel signal chains are subsequently scanned and read out simultaneously. Thus, the frame time is reduced by approximately a factor of k while achieving essentially similar dynamic range increase comparing to the use of a single column-parallel signal chain for k integration times.

Furthermore, an intermediate number of column-parallel signal chains between 1 and k can be used to produce a desired set of k integration times and a frame rate tailored for a specific application. At least one of the column-parallel chains is used to obtain at least two sets of data with different integration times.

The above embodiments contemplate using a destructive readout, wherein an active pixel is reset for another integration after the signal therein is copied and read out. One advantage of the destructive readout is that the on-chip correlated doubling sampling can be implemented in many active pixel sensors to suppress noise such as the fixed pattern noise and the kTC noise. This is disclosed by Mendis et al. in "CMOS Active Pixel Image Sensor", IEEE Transactions On Electron Devices, Vol.41(3), pp.452-453, March, 1994. A non-destructive readout can also be used with the above embodiments for an increased dynamic range and possibly increased speed. Each pixel continues to integrate the signal and the pixel value is copied and read

out without resetting. One advantage of the non-destructive readout is that a fewer number of rows are needed than that in the destructive readout to achieve the same multiple integration periods. For example, non-destructive readout can be used to achieve four different integration times $T_{1int} = 1 \times 4T_{row}$, $T_{2int} = 8 \times 4T_{row}$, $T_{3int} = 64 \times 4T_{row}$, and $T_{4int} = 512 \times 4T_{row}$ using one column-parallel signal chain with 512 rows of pixels rather than 585 rows in the destructive readout. This can be done by choosing $\Delta_1=1$, $\Delta_2=7$, and $\Delta_4=56$ in a 512-row active pixel array.

Device Implementation

(1) Choice of Pixel The architectures of active pixel array for extended dynamic range previously described can be implemented with a number of possibilities. The preferred pixel design is a photogate CMOS APS shown in FIG. 3. However, many pixel designs of active-type and passive-type can be used. Examples of such include photodiode CMOS APS, a pinned photodiode CMOS APS, the passive pixel photodiode sensor, the charge modulation device active pixel sensor, and bipolar transistor-based pixels.

(2) Chip Layout One or more column-parallel signal chains can use different elements in the pixels thereof including capacitors and analog-to-digital converters (ADCs). The physical floor plans of multiple column-

parallel signal chains such as FIG. 2 and single column-parallel signal chain as in FIG. 1 can be varied as desired in practicing the present invention. For example, the second column-parallel signal chain 206 can be positioned with the first column-parallel signal chain 204 at the lower part of the active pixel array 202 as illustrated by FIG. 5.

(3) Multiple Outputs per Pixel The inventors contemplate that a plurality of output source followers can be included in each pixel rather than one output source follower as described hereabove (e.g., FIG. 3). Each output source follower can be attached to a separate column bus and each column bus in turn can be attached to its own column parallel signal chain. This approach may provide greater flexibility in choosing the integration times.

(4) Pixel Synchronization The above-described embodiments use multiple data points of different integration times from the same pixel which are read out at different times rather than simultaneously. If it is desired to synchronize the output of the two or more data points from the same pixel, an on-chip buffer memory is needed. The buffer memory holds the data from a pixel until all data points from that pixel are read out so that all the data points can be sent out simultaneously. In the case of the first embodiment 200 of FIG. 2, the buffer memory should be Δ rows in size and has a capacity of storing half of the

data from an image in the worst case. If on-chip ADC is used, the output of the buffer memory can be the input to the ADC.





A High Performance Analog-to-Digital Converter ("ADC")

5 A high speed ADC with a high resolution can be made using the described techniques of the present invention. The multiple data points generated from each pixel can be converted from analog to digital with multiple ADCs with each data point being processed by one ADC. This can generate both a high resolution conversion by combining the bits from each data point and a fast conversion speed since the multiple ADCs operate in parallel.

For example, the architecture shown in FIG. 1 with a readout of four data points per pixel can be used for such a ADC. For illustration purpose, it is assumed that $N=585$, $k=4$, $\Delta_1=1$, $\Delta_2=8$, $\Delta_3=64$ so that $T_{1int} = 1 \times 4T_{row}$, $T_{2int} = 8 \times 4T_{row}$, $T_{3int} = 64 \times 4T_{row}$, and $T_{4int} = 512 \times 4T_{row}$. If each data point is converted using a 3-bit ADC, an ADC word length of 12 bits can be generated by patching the four outputs of the ADCs together. The time domain, which can be accurately controlled, is used to provide the effective gain of 8x between each of the four data points. This is shown in Table 1. Each of the four ADCs is shown as a single slope ADC, with an increment of 0.250mV per step and a total of 8

levels. The time required for each conversion is 8 cycles. Since the four ADCs can be operated in parallel, the total time to achieve the 12-bit resolution could remain as 8 cycles. Typically, each cycle is of the order $1\mu\text{s}$ so that a complete conversion can be finished in $8\mu\text{s}$. The bits from the four ADCs corresponding to four data points are reassembled externally to generate the 12-bit output.

Table 1

				
Integration Time (T_{row})	1	8	64	512
Number of Steps	8	8	8	8
Actual volts per step	0.250 mV	0.250 mV	0.250 mV	0.250 mV
Effective volts per step	128.000 mV	16.000 mV	2.000 mV	0.250 mV
Full effective range	1024.000 mV	128.000 mV	16.000 mV	2.000 mV

It is noted that achieving n-bit dynamic range is not equivalent to obtaining n-bit resolution. For example, the

5 sensor of the above-described case could be saturated for the three long integration times for a given light intensity at a pixel, thus only the data with the shortest integration time is used. One way to improve the number of significant digits is to use a higher resolution ADC to have some overlap in conversion range.

Although the present invention has been described in detail with reference to several embodiments, one ordinarily skilled in the art to which this invention pertains will appreciate that various modifications and enhancements may be made in the described embodiments.

For example, the techniques of the embodiments described use readout units of rows and column-parallel readout chains. It should be appreciated that readout units could be other pixel blocks, such as neighboring pixel patches (e.g., 7x7 pixel areas), or any other desired shape. Accordingly, the readout chains can be changed to accommodate the choice of readout units. While the embodiments describe obtaining two integration signals for each pixel being stored, it should be understood that any number, e.g., 3 or 4, integration times could be used. Additional column-parallel signal chains may be added to maintain the frame rate while increasing the number of integration times. Alternatively, the chip design can be maintained at a price of a slower frame rate to increase the

number of integration times using the readout method of the present invention.

These and other modifications and enhancements are intended to be encompassed by the following claims.

What is claimed is:

1. A device substantially as described.

005060 22845960

AN IMAGE SENSOR WITH HIGH DYNAMIC RANGE LINEAR OUTPUT

Abstract of the Disclosure

Designs and operational methods to increase the dynamic range of image sensors and APS devices in particular by achieving more than one integration times for each pixel thereof. An APS system with more than one column-parallel signal chains for readout are described for maintaining a high frame rate in readout. Each active pixel is sampled for multiple times during a single frame readout, thus resulting in multiple integration times. The operation methods can also be used to obtain multiple integration times for each pixel with an APS design having a single column-parallel signal chain for readout. Furthermore, analog-to-digital conversion of high speed and high resolution can be implemented.

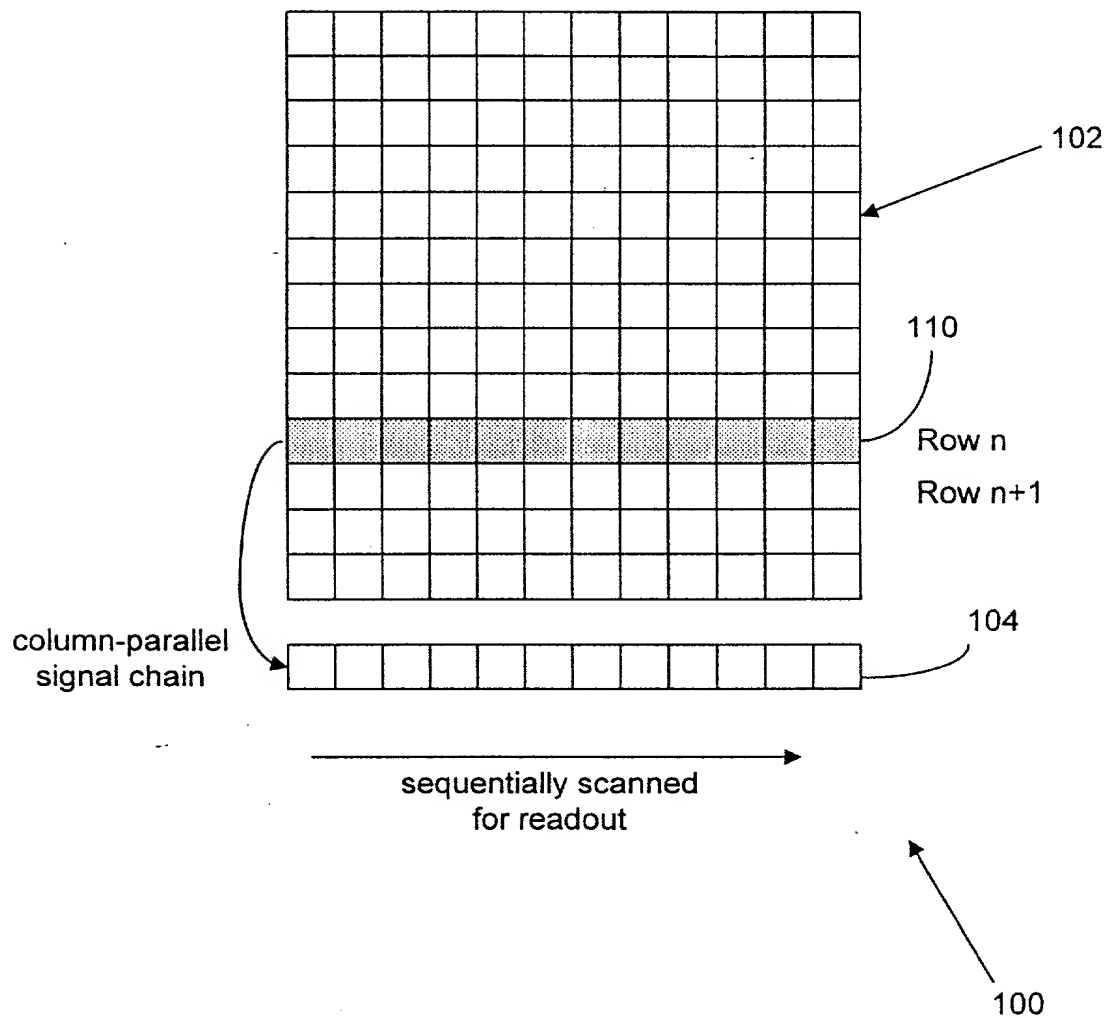


FIG. 1

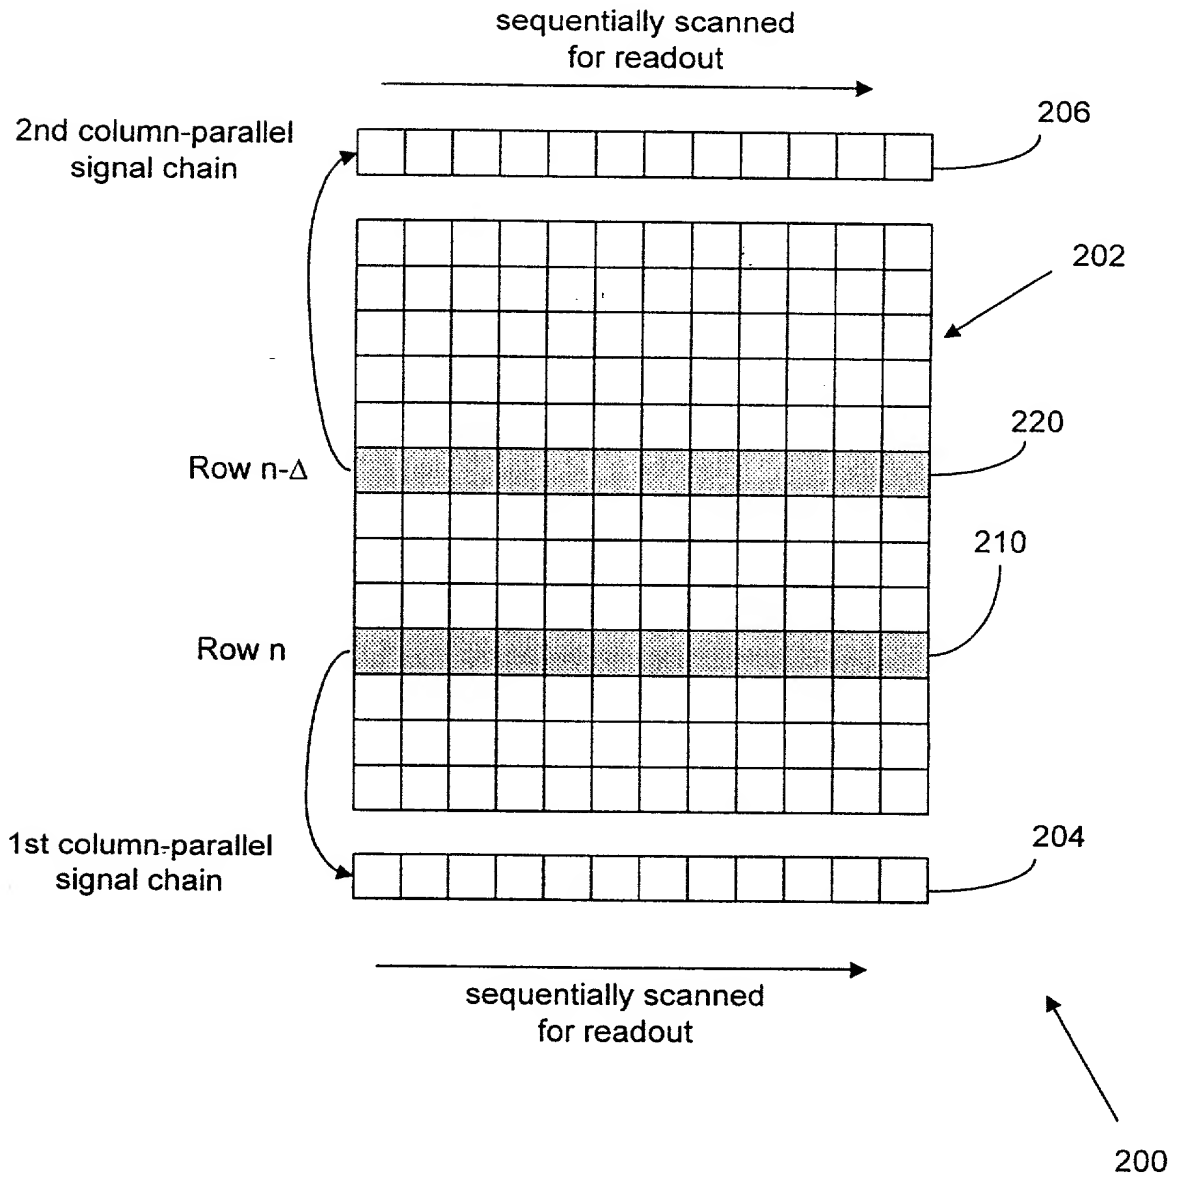


FIG. 2

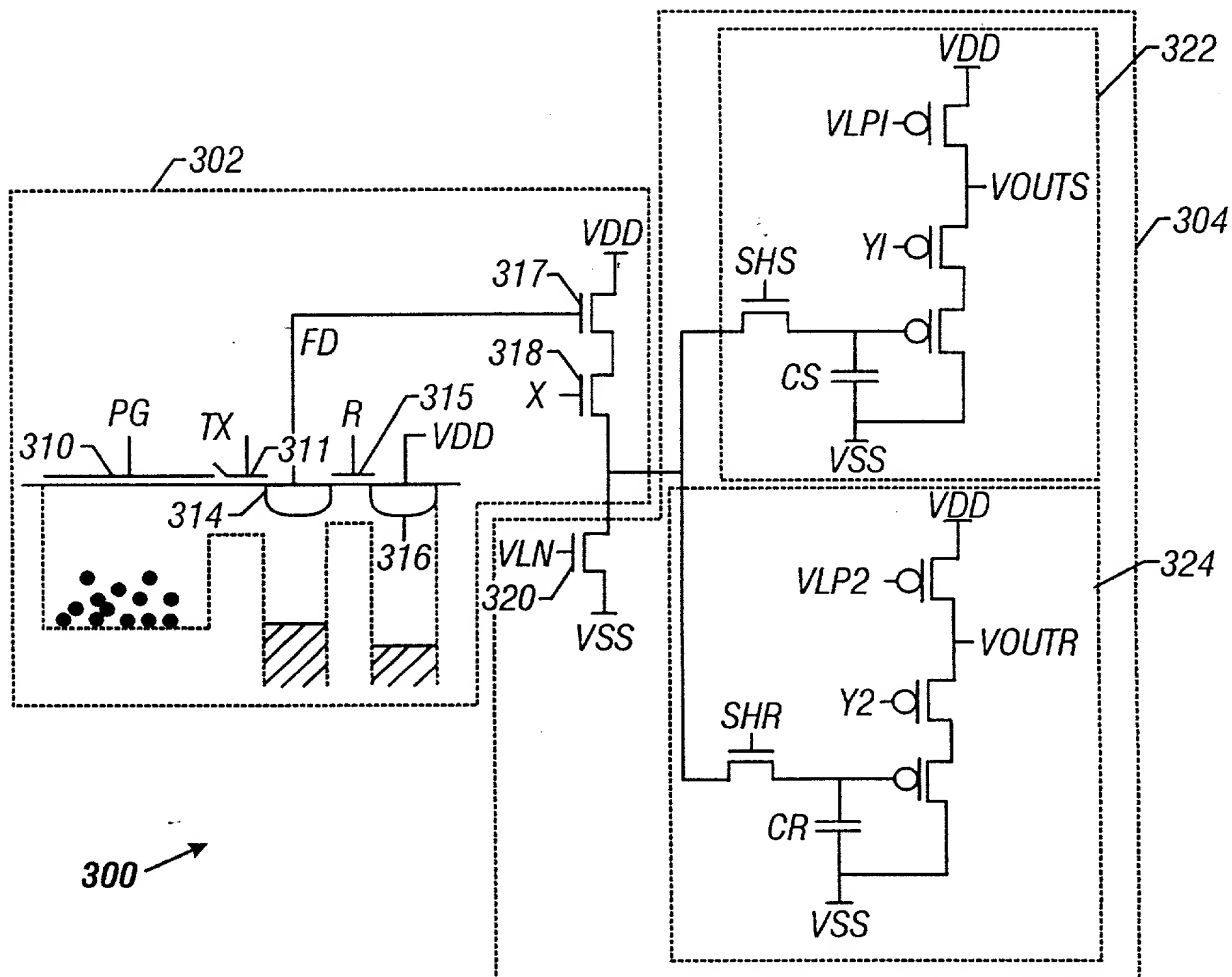


FIG. 3

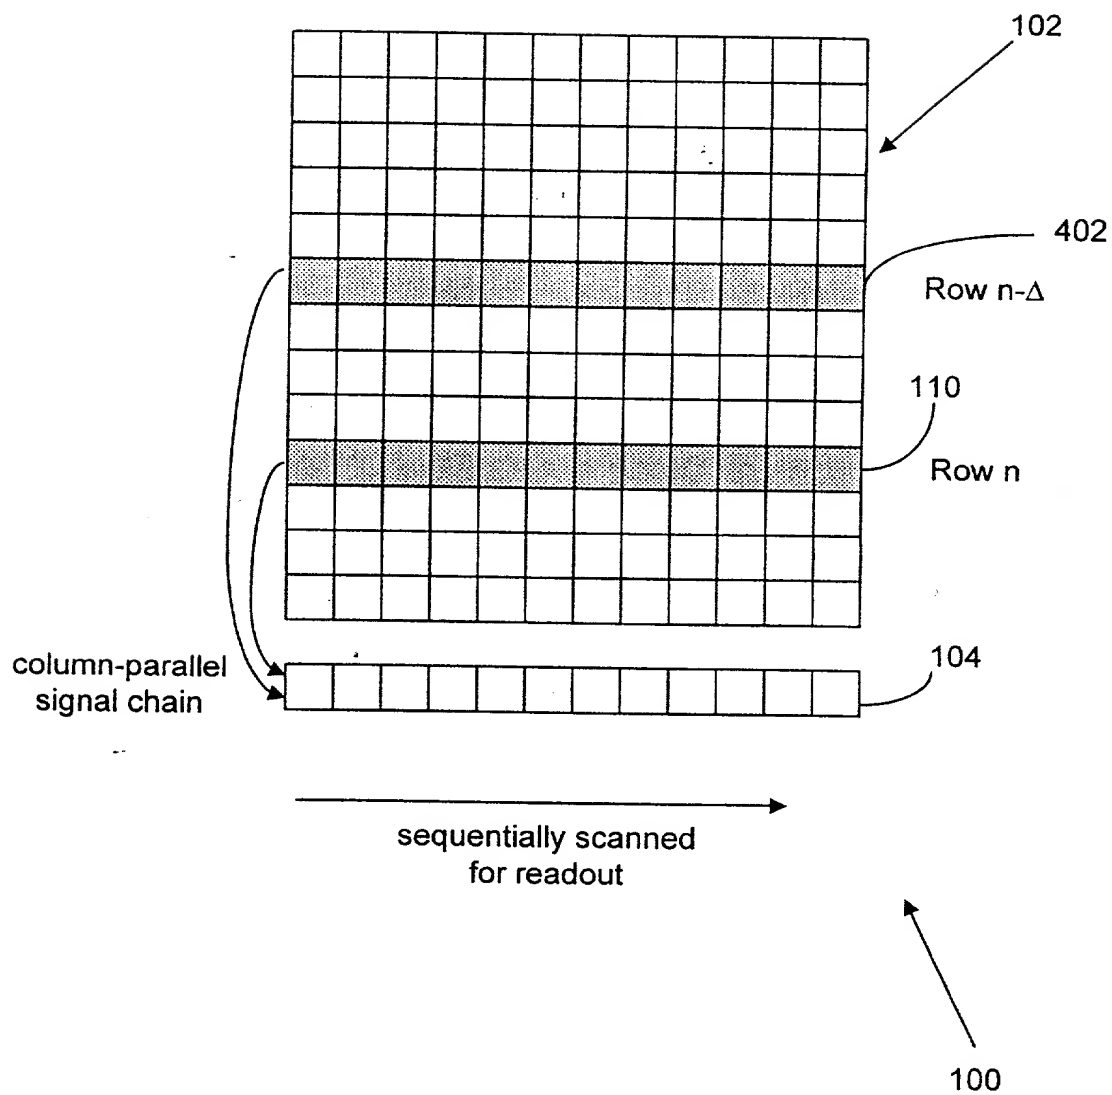


FIG. 4

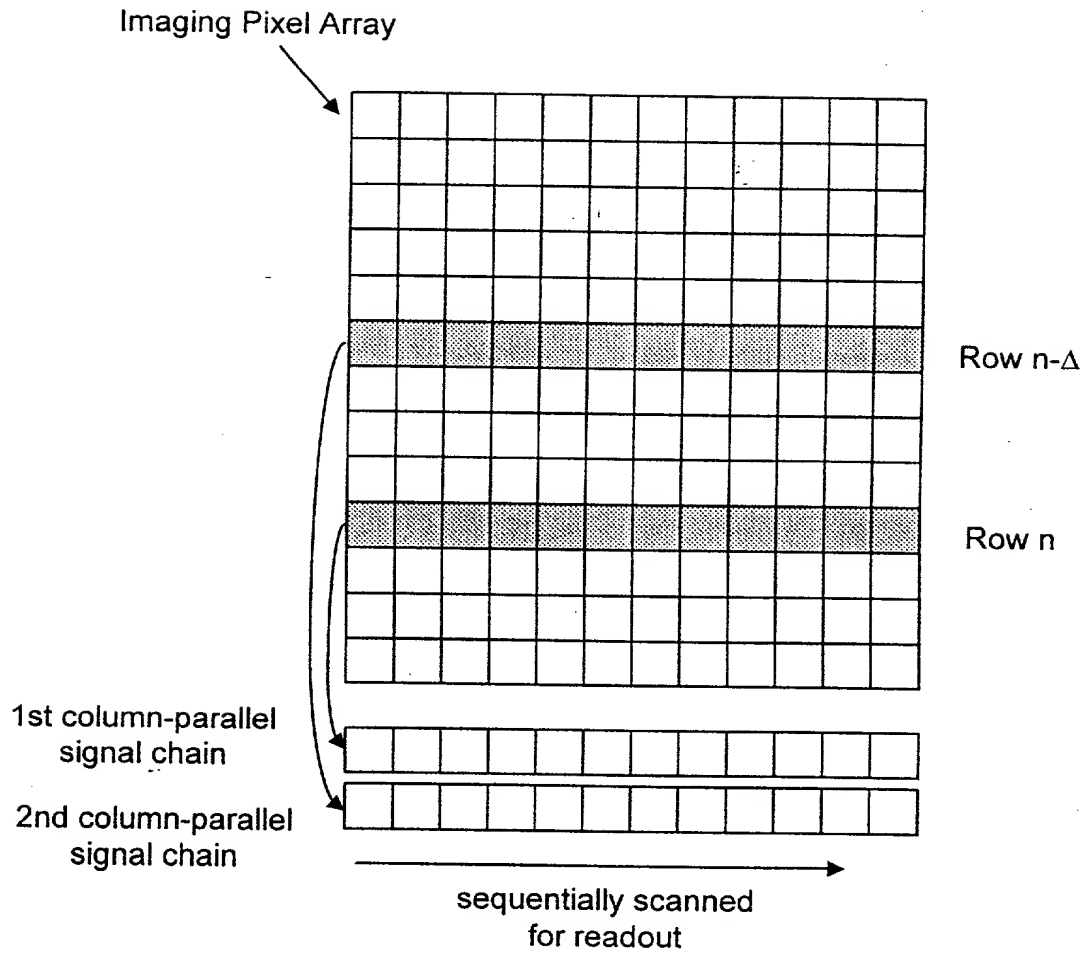


FIG. 5

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled AN IMAGE SENSOR WITH HIGH DYNAMIC RANGE LINEAR OUTPUT, the specification of which

☐ is attached hereto.

☒ was filed on November 7, 1996 as Application Serial No. _____ and was amended on _____.

☐ was described and claimed in PCT International Application No. _____
filed on _____ and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Scott C. Harris, Reg. No. 32,030

Address all telephone calls to Scott C. Harris at telephone number 619/678 -5070.

Address all correspondence to Scott C. Harris, Fish & Richardson P.C., 4225 Executive Square, Suite 1400, La Jolla, CA 92037.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: Orly Yadid-Pecht

Inventor's Signature: Oy Date: 2-22-97

Residence Address: Arcadia, California

Citizen of: Israel

Post Office Address: 821 Arcadia Avenue, #13, Arcadia, California

COMBINED DECLARATION AND POWER OF ATTORNEY CONTINUED

Full Name of Inventor: Eric R. Fossum

Inventor's Signature: _____

Date: _____

3-17-97

Residence Address: La Crescenta, California

Citizen of: USA

Post Office Address: 5556 Pinecone Road, La Crescenta, California

21317.L11

005050" 22645960